INSTALLATION INSTRUCTIONS

NEW 04/06/2005

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the circuit breaker and remove old fixture from ceiling, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two Mounting Screws (C) about 1/4" into the pre-drilled holes in the Crossbar (A) spaced the same distance apart as the holes in the Ceiling Pan (E).
4. Attach the Crossbar (A) to the Outlet Box using the two Screws (B) from the outlet box. The side of the Crossbar marked "GND" must face out.
5. Now place the Trim Ring (D), over the Ceiling Pan (E) and raise to the ceiling.

CONNECTING THE WIRES (Fig.2)

6. While holding the Ceiling Pan towards the ceiling, connect the electrical wires as shown in (Fig.2), making sure that all wire connectors are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's Ground Wire to it. Otherwise, connect the fixture's Ground Wire directly to the Crossbar using the Green Screw provided. After wires are connected, tuck them carefully into the ceiling Outlet Box.

FINISHING THE INSTALLATION (Fig. 1)

7. Finish mounting the Ceiling Pan assembly by placing it over the two Mounting Screws (C) so they protrude through the "keyholes" in the bottom of the pan. Rotate the Pan until the screws are in the slots of the "keyholes" and tighten with a screwdriver.
8. Install the light bulbs in accordance with fixtures specifications. **(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!!)**
9. Thread the Nipple (F) into Ceiling Pan (E). Place Glass Shade (G) over the Nipple and tighten with Bottom Cap (H) and Finial (I) as shown in Fig.1.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

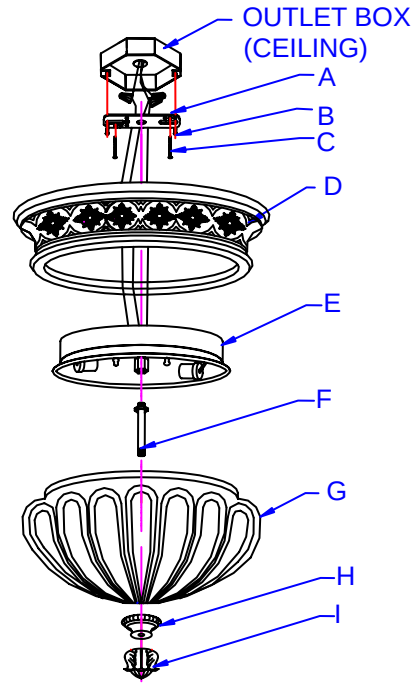

Fig. 2

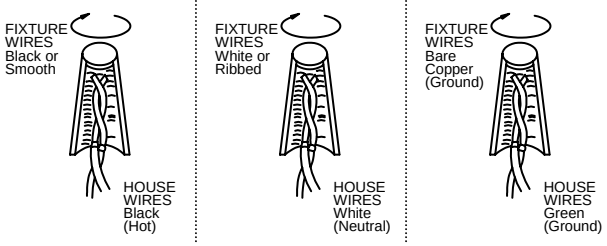
FIXTURE WIRES Black or Smooth
HOUSE WIRES Black (Hot)
FIXTURE WIRES White or Ribbed
HOUSE WIRES White (Neutral)
FIXTURE WIRES Bare Copper (Ground)
HOUSE WIRES Green (Ground)

In the event that you should have any installation question or are missing parts, please contact **Customer Service**. Customer service may be reached weekdays a ***1-800-527-0998*** between the hours of 8:00am and 5:00pm PST (Pacific Standard Time).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-858E/S

INSTRUCCIONES PARA LA INSTALACION

Nueva 04/06/2005

ADVERTENCIA! CORTE LA CORRIENTE DESDE EL FUSIBLE O EL INTERRUPTOR CENTRAL.

MONTANDO LA LAMPARA (Fig.1)

1. Corte la corriente en el circuito principal y quite la lampara vieja incluyendo el montaje.
2. Desempaque cuidadosamente su nueva lampara y coloque todas las partes en una superfice despejada. Tenga cuidado de no perder las partes pequeñas que son necesarias para la instalacion.
3. Atornille los dos Tachones (C) ¼" en los agujeros de la Barra Transversal (A), separados en la misma distancia que los agujeros del Plato (E).
4. Coloque la Barra Transversal (A) y montelo a la Caja de Union usando los dos Tornillos (B). El lado marvado "GND" deben quedar hacia afuera.
5. Coloque el Plato Decorativo (D), sobre el Plato (E) y levante los al techo.

CONECTANDO LOS ALAMBRES (Fig.2)

6. Mientras sostiene el Plato contra el techo conecte el alambrado electrico como se muestra en la (Fig.2), use un conector de plastico para asegurar la conexion. Si su caja de union tiene un alambre de tierra (verde o de cobre), conecte el alambre de tierra de lampara. Si no tiene, entonces conecte el alambre de tierra de la lampara directamente a la barra transversal usando el tornillo verde incluido. Meta ordenamente las conexiones a la Caja de Union.

TERMINANDO LA INSTALACION (Fig. 1)

7. Sujete el Plato hacia al techo colocando sobre los dos Tachones (C), de manera que se asomen a traves de los "agujeros" de la parte debajo del plato. Haga girar el Plato asta que los dos tornillos esten en las ranuras de los "agujeros" y apriete los tornillos con un desarmador.
8. Instale los focos de acuerdo a las especificaciones**. (NO EXCEDA MAS DE LOS VATIOS ESPECIFICADOS!!)**
9. Coloque la Boquilla (F) al Plato (E). Deslize la Pantalla de Vidrio (G) sobre la boquilla y asegurela con la Copa (H) y la Tuerca Decorativa (I) como se muestran en la Fig.1.

   Su instalacion a terminado, conecte la corriente electrica y pruebe la lampara.

Nota: La illustracion el la (Fig. 1) de este manual es para el proposito de instalacion solamente. Puede variar con la lampara que usted compro.

Fig. 1

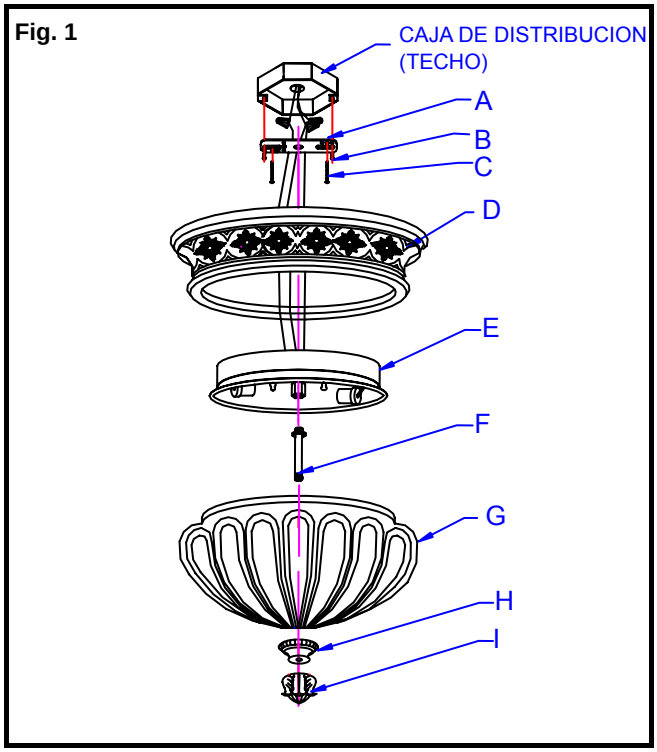

Fig. 2

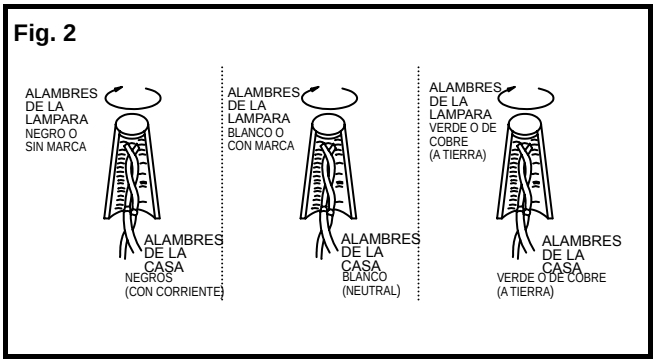
ALAMBRES DE LA LAMPARA NEGRO O SIN MARCA
ALAMBRES DE LA CASA NEGROS (CON CORRIENTE)
ALAMBRES DE LA LAMPARA BLANCO O CON MARCA
ALAMBRES DE LA CASA BLANCO (NEUTRAL)
ALAMBRES DE LA LAMPARA VERDE O DE COBRE (A TIERRA)
ALAMBRES DE LA CASA VERDE O DE COBRE (A TIERRA)

En caso de preguntas sobre la instalacion o le faltaron partes, porfavor hablar al departamento de **Servicio al Cliente** al **1-800-527-0998** de Lunes a Viernes de 8:00 a.m. a 5:00 p.m. PST (Tiempo del Pacifico).

2455 PACES FERRY RD., N.W., ATLANTA, GA 30339

LA-858E/S